



# Replace HDD Hard Drive

Written By: Felice Suglia





## TOOLS:


- [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — accumulator




- Open the latch of the battery on the right side.
- Open the latch of the battery on the left side.
- Remove the battery.

## Step 2 — Access to the components 1

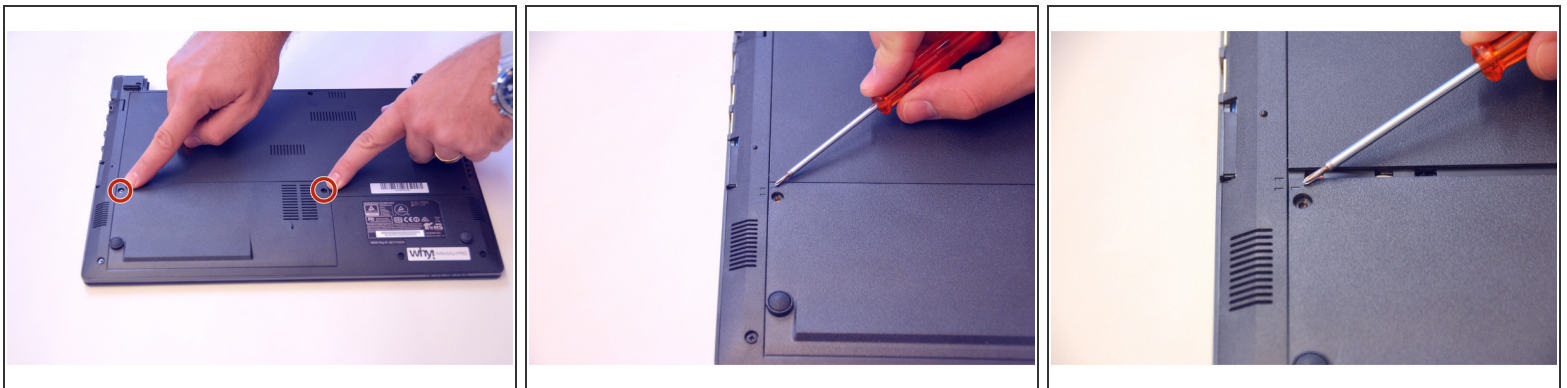


- Remove the Philips screwdriver to remove the two screws on the bottom cover.
- Check the markers to determine how the cover must be removed.
- Now remove the cover as required by the marker.

## Step 3

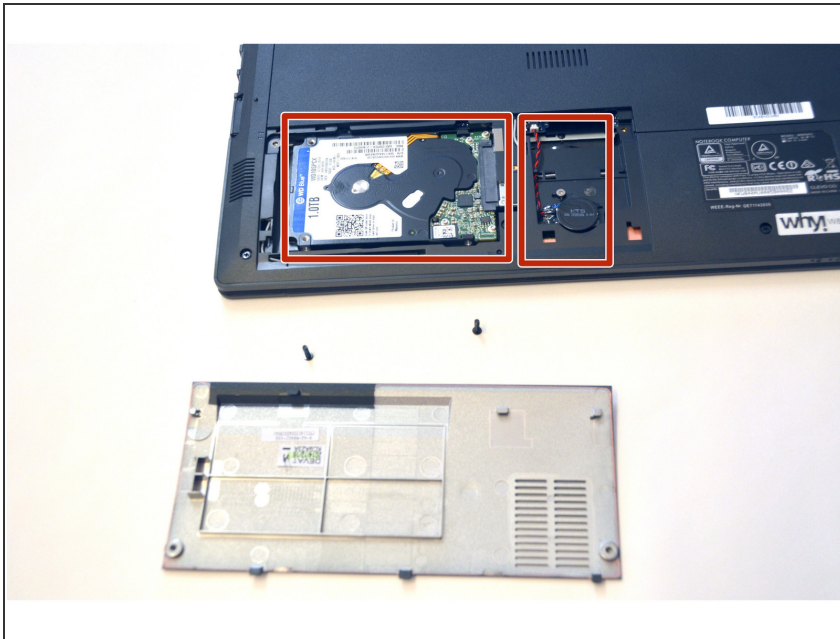

- The components HDD HDD and BIOS battery are now visible.

## Step 4 — HDD Hard Drive

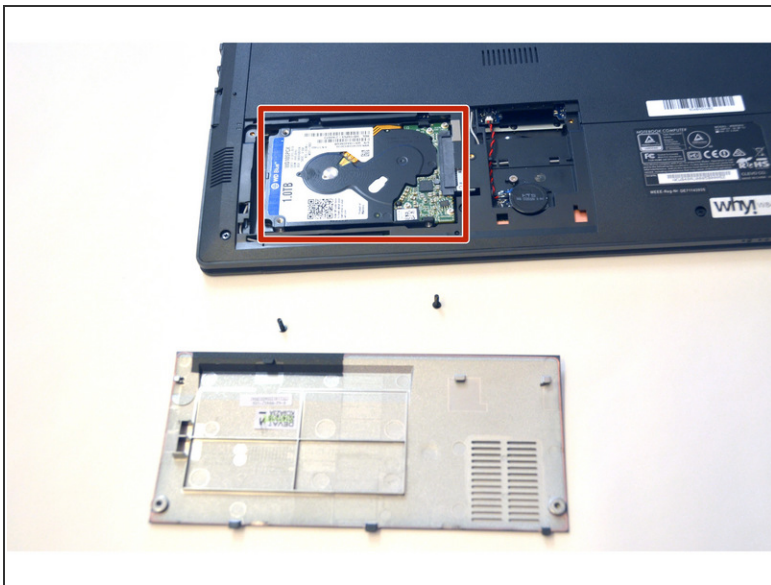

- Drag HDD hard drive from his SATA3 connector.
- So the solid HDD looks hard drive

Um das Gerät wieder zusammen zu bauen gehen Sie in umgekehrter Reihenfolge vor.

